BOM Table						
ITEM NO.	PART NUMBER	Rev.	Description	Material	Color	QTY.
1	SCREWS-026-004	-	SCREWS, 4 PACK			1
1.1	SCREWS-026	-	M5X0.8 x 10mm CROSS TRUSS HEAD SCREW			4
2	WQ-66S-02	-	Hinged Nema Enclosure-Outdoor Use			1
2.1	WQ-66B-02	-	BASE	GFR10/PC	GRAY	1
2.2	WQ-66C-02	-	COVER W/GASKET	PC	GRAY	1
2.3	WQ-57L-01	-.01	LATCH ASSEMBLY	-		2
2.4	WQ-PIN-02	-	HINGE PIN	SST	-	2

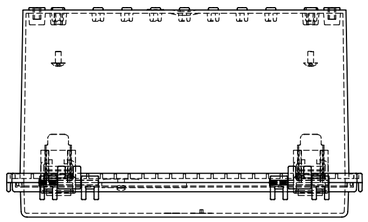

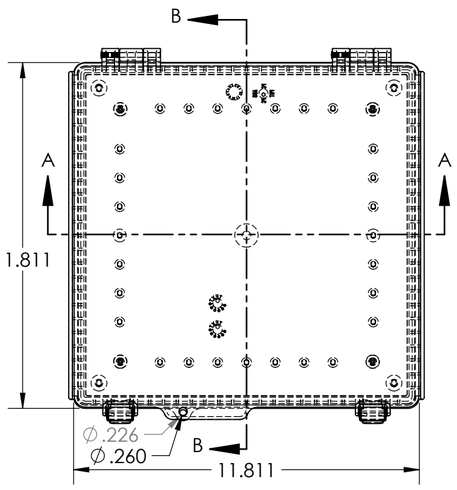

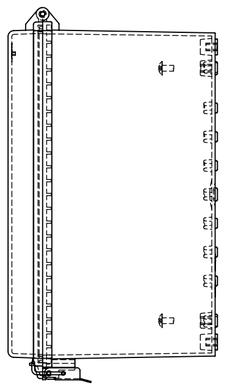

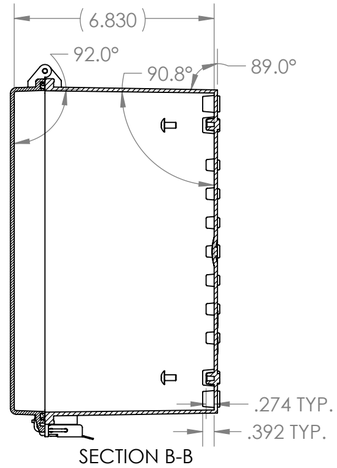

SECTION B-B

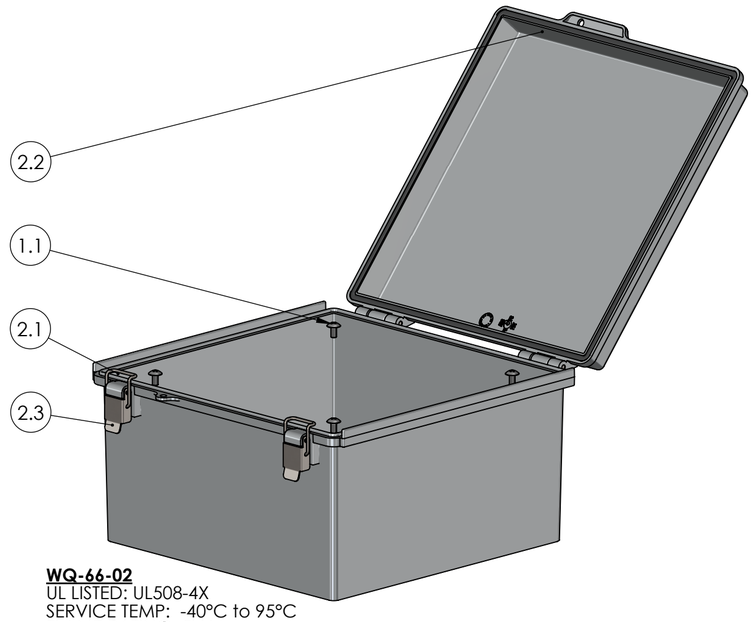

WQ-66-02
UL LISTED: UL508-4X
SERVICE TEMP: -40°C to 95°C
FLAME RATING: 5VA
Outdoor Suitability: UL746C F1

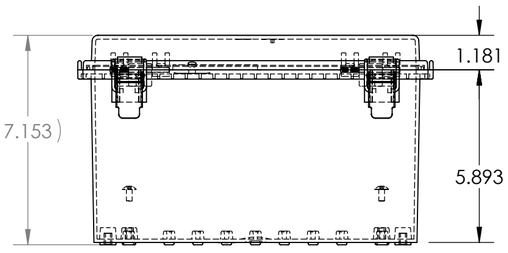

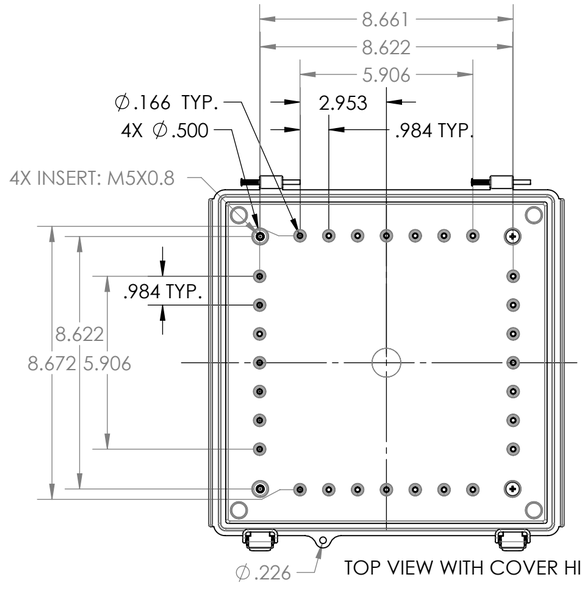

TOP VIEW WITH COVER HIDDEN

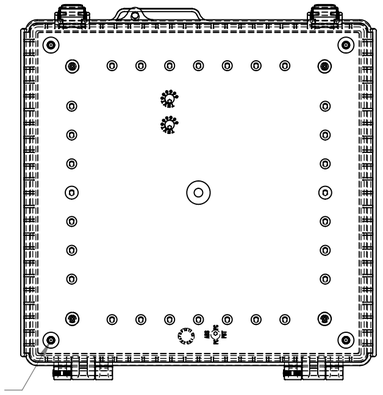

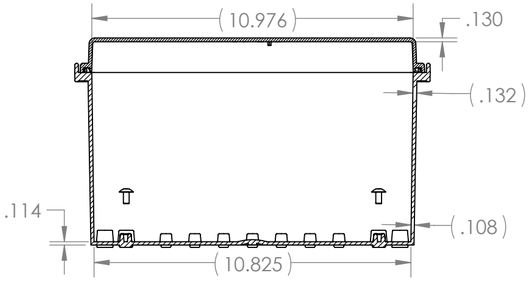

SECTION A-A

BOM Table						
ITEM NO.	PART NUMBER	Rev.	Description	Material	Color	QTY.
1	SCREWS-026-004	-	SCREWS, 4 PACK			1
1.1	SCREWS-026	-	M5X0.8 x 10mm CROSS TRUSS HEAD SCREW			4
2	WQ-66S-03	-	Hinged Nema Enclosure-Outdoor Use			1
2.1	WQ-66B-02	-	BASE	GFR10/PC	GRAY	1
2.2	WQ-66C-03	-	COVER W/GASKET	PC	CLEAR	1
2.3	WQ-57L-01	-.01	LATCH ASSEMBLY	-		2
2.4	WQ-PIN-02	-	HINGE PIN	SST	-	2

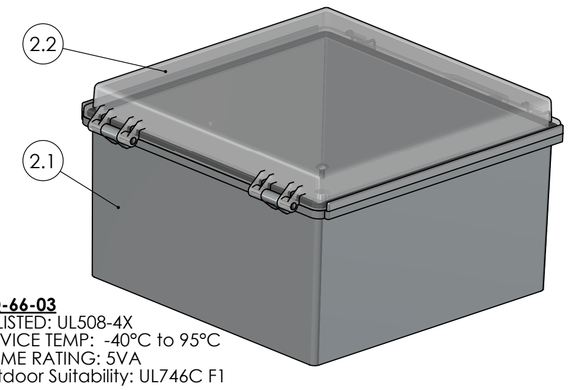

WQ-66-03
UL LISTED: UL508-4X
SERVICE TEMP: -40°C to 95°C
FLAME RATING: 5VA
Outdoor Suitability: UL746C F1

REVISIONS					
REV.	DESCRIPTION	ZONE	BY	APPR'D	DATE

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN: INCHES[mm]
TOLERANCES: ANGULAR: ±-°
TWO PLACE DECIMAL: ±-
THREE PLACE DECIMAL: ±-
PRINTED GRAPHICS: ±-

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYCASE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYCASE IS PROHIBITED.

CAD FILE: WQ-66

PART NO.
WQ-66

MATERIAL

FLAME RATING
5VA

	NAME	DATE
DRAWN	D.M.F.	3/10/2021
CHECKED	C.C.B.	3/25/2021

polycase
1306 CHESTER IND. PARKWAY AVON, OHIO 44011-1083 U.S.A.
PH#: 1-800-248-1233, 440-934-0444 FAX#: 440-934-0088

SIZE C

Hinged Nema Enclosure, Outdoor Use, with Screw Kit

REV -

SCALE: 1:4

SHEET 1 OF 1